

MATERIAL DATA SPC-500F

NO.	DESCRIPTION	MATERIAL	NO.	DESCRIPTION	MATERIAL	NO.	DESCRIPTION	MATERIAL
1	Bolt	11	19	"O" Ring		37	"O" Ring	Rubber
2	Washer	11	20	Upper cover	NBR	38	Bolt	0Cr18Ni9
3	Protector	11	21	Screw	No35B	39	Oil seal	
4	Cable presser	11	22	Spring washer	NBR	40	Washer	0Cr18Ni9
5	Washer	11	23	Washer		41	Impeller	
6	Screw	NR	24	Line protector	11	42	Washer	0Cr18Ni9
7	Nut	11	25	Undelated washer	1566	43	Spring washer	0Cr18Ni9
8	Handle	11	26	Beraing		44	Nut	0Cr18Ni9
9	Screw	11	27	Rotor		45	Gasket	Rubber
10	Flange	11	28	Bearing		46	Outlet connector	ABS
11	Cable protector		29	Thermal protector		47	"O" Ring	Rubber
12	Float switch	11	30	Stator	ZL102	48	Bolt	0Cr18Ni9
13	Capacitor cover	CR	31	Mechanical seal	graphite to ceramic	49	Washer	0Cr18Ni9
14	Bolt	11	32	"O" Ring	Rubber	50	Flange	HT200
15	Washer	NBR	33	Nut	0Cr18Ni9	51	Gasket	Rubber
16	Cable	11	34	Washer	0Cr18Ni9	52	Pump casing	HT200
17	Gasket	No35B	35	Connection part	HT200	53	Base plate	
18	Capacitor	NBR	36	Screw	0Cr18Ni9	54	Bolt	

**A FULLY SUBMERSIBLE PUMP,
IDEALLY SUITED TO EMPTYING TANKS,
BASEMENTS, POOLS AND DRAINS.**

RANGE OF PERFORMANCE

Flow rate up to 580L/min
Head up to 9 m

WORKING CONDITION

Maximum depth allowed is 5m from its
Center of impeller
Liquid temperature up to +40°C
PH figure of the water between 6.5-8.5
The grain diameter of solids in the water is no
bigger than 0.2mm




SPK450A

SPK450

SPT500



SPC370

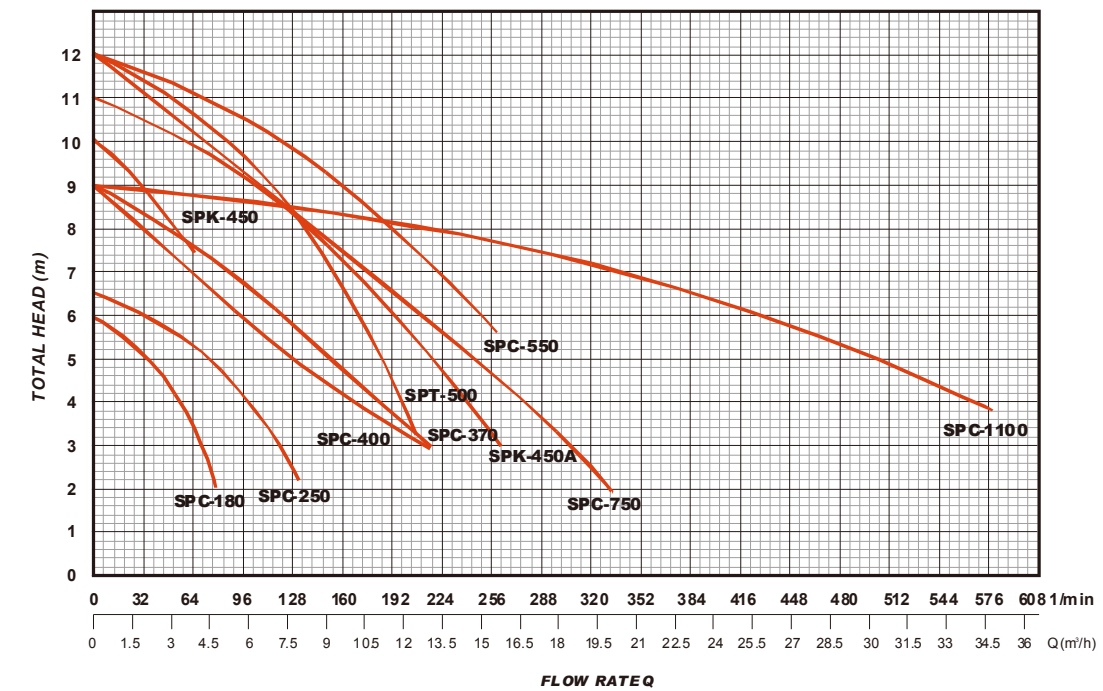

SERIES SPC

MODEL	POWER (kw)	OUTLET DIA (mm)	VOLTAGE (V/Hz)	MAX.FLOW (l/min)	MAX.HEAD (m)	G.W. (Kg)	DIMENSIONS (cm)
SPC-180 (F)	0.18	25	220/50	80	6	6.5	20.5x18.5x34
SPC-250 (F)	0.25	40,32,25	220/50	130	6.5	7.5	20.5x18.5x32.5
SPC-370(F)	0.37	40	220/50	216	9	12.5	25x22x41.5
SPC-400(F)	0.40	50	220/50	216	9	13.5	25x22x43.5
SPK-450(F)	0.45	25	220/50	65	10	11.5	23x23x35
SPK-450A	0.45	25	220/50	260	11	11	23*23*35
SPT-500(F)	0.5	50	220/50	210	12	15	24.5x22x40
SPT-750B	0.75	75	220/50	250	18	15.5	32x22.5x43
SPC-550(F)	0.55	50,40	220/50	260	10	13.5	24.5x22x40
SPC-750(F)	0.75	50	220/50	333	12	15	27x23.5x41.5
SPC-1100(F)	1.1	75	220/50	580	9	21	32.5x22.5x48.5