


Performance chart at n=2850 r/min(50hz)

Total head(m)

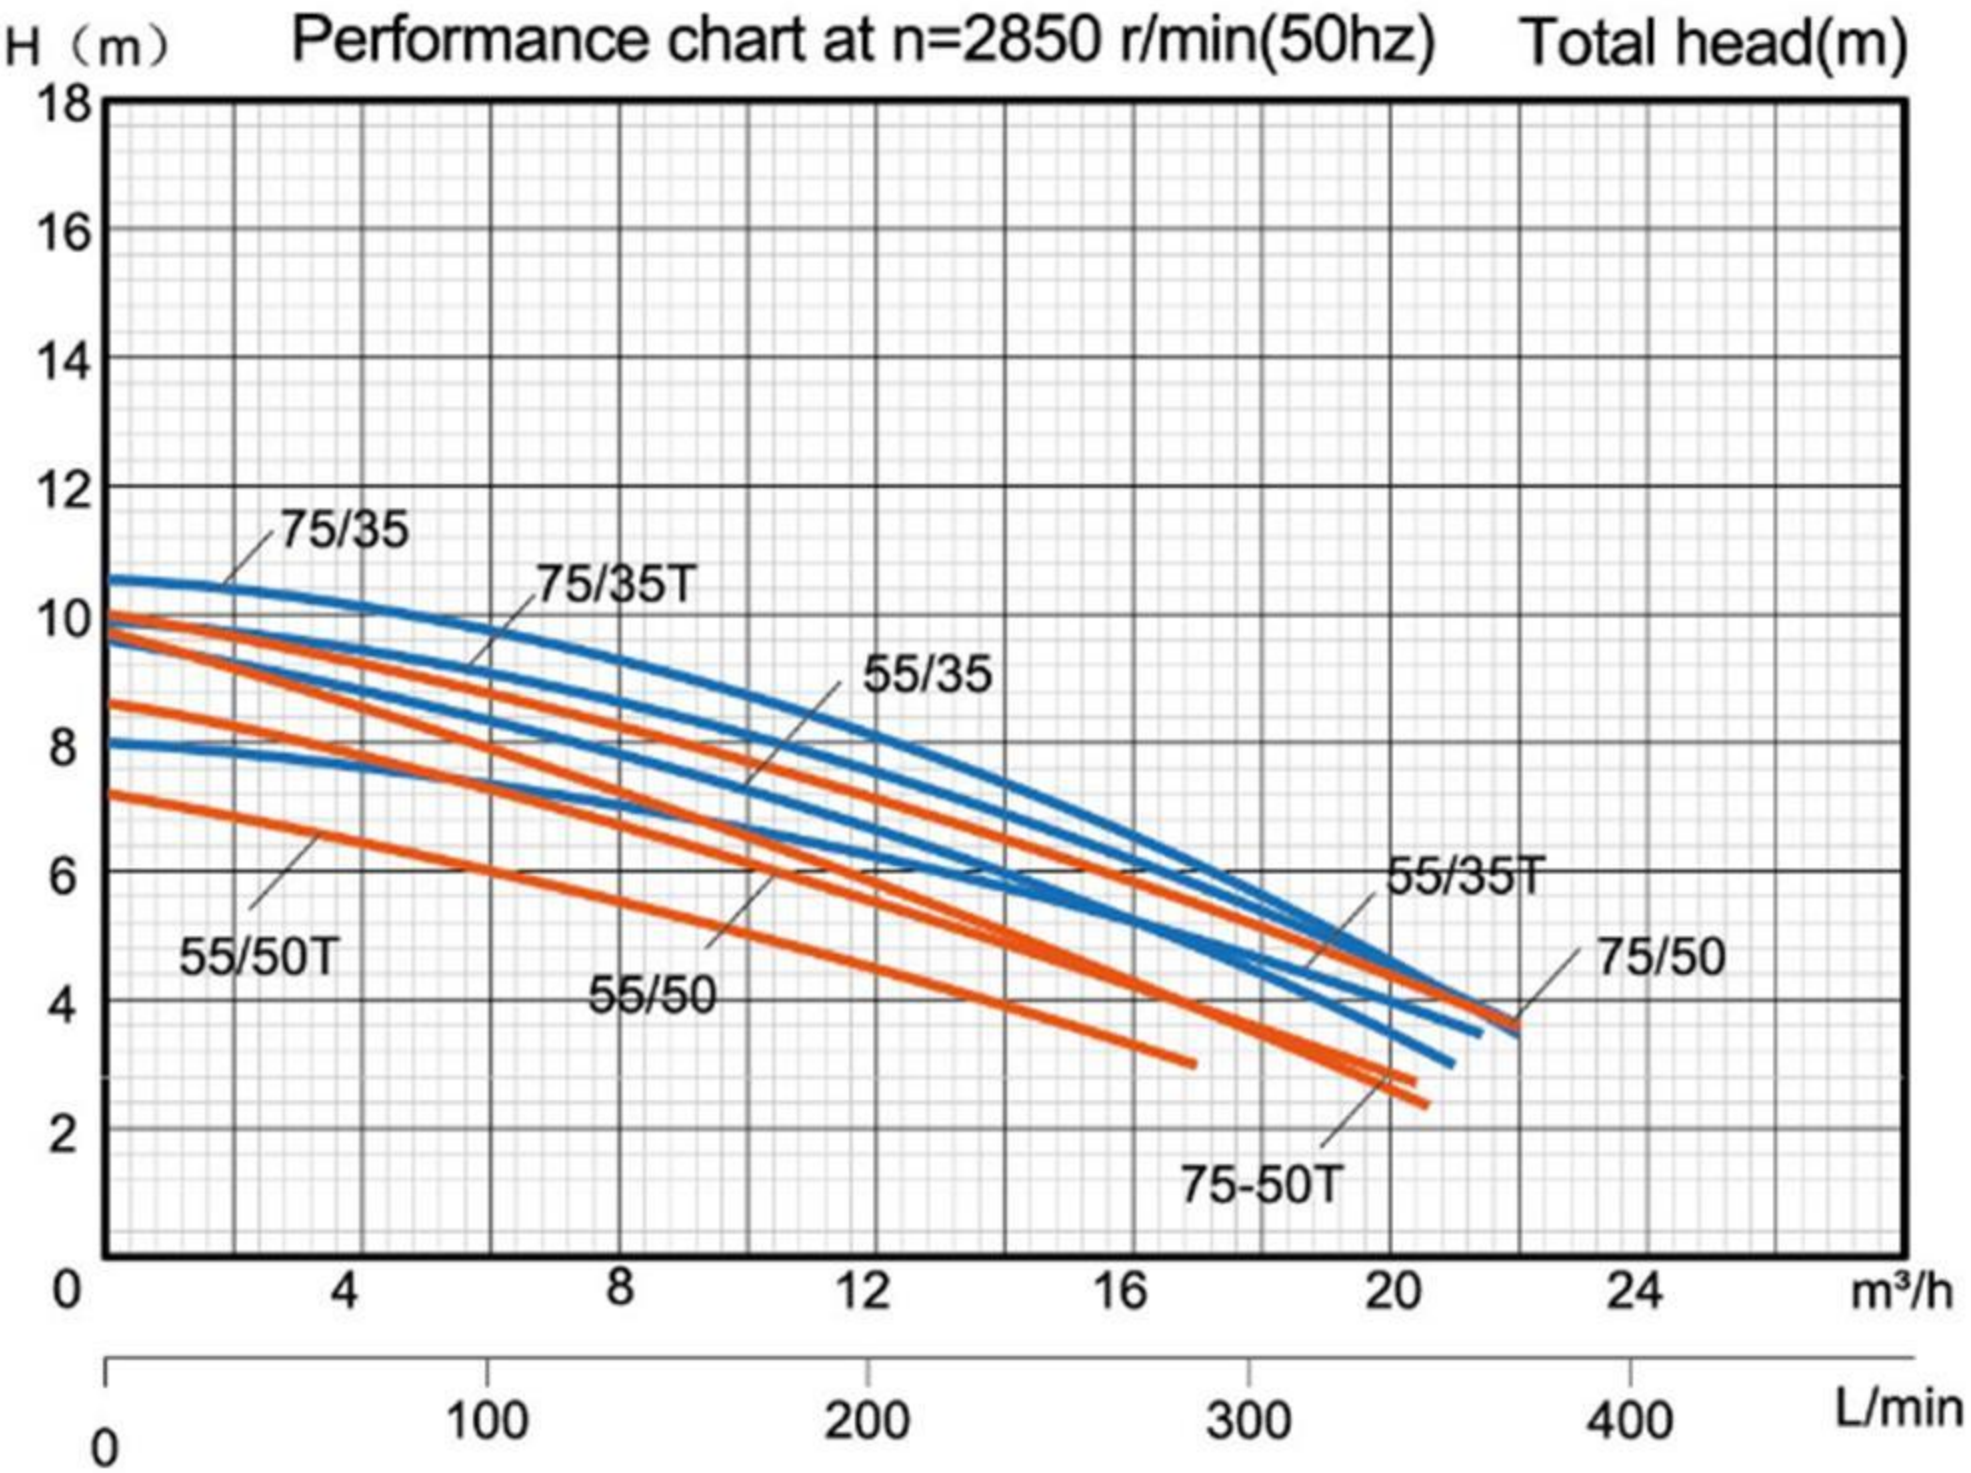

Model Single-Phase	Power		Outlet Inch	Max.Flow m ³ /h	Max.Head m	Dim. mm	Weight (kg)		20' Loading Qty pcs
	kW	HP					G.W.	N.W.	
SWSD55/35	0.55	0.75	2	19	8.5	230×200×465	9.5	9	1350
SWSD75/35	0.75	1	2	24	10	230×200×465	10.6	10	1350
SWSD55/50	0.55	0.75	2	20	8	230×200×465	9.5	9	1350
SWSD75/50	0.75	1	2	22	9.5	230×200×465	10.6	10	1350
SWSD55/35T	0.55	0.75	2	20	8	230×200×465	12.4	12	1350
SWSD75/35T	0.75	1	2	24	9.5	230×200×465	13.4	13	1350
SWSD55/50T	0.55	0.75	2	16	7	230×200×465	12.3	12	1350
SWSD75/50T	0.75	1	2	20	9.5	230×200×465	13.8	13	1350