


H (m) Performance chart at n=2850 r/min(50hz) Total head(m)

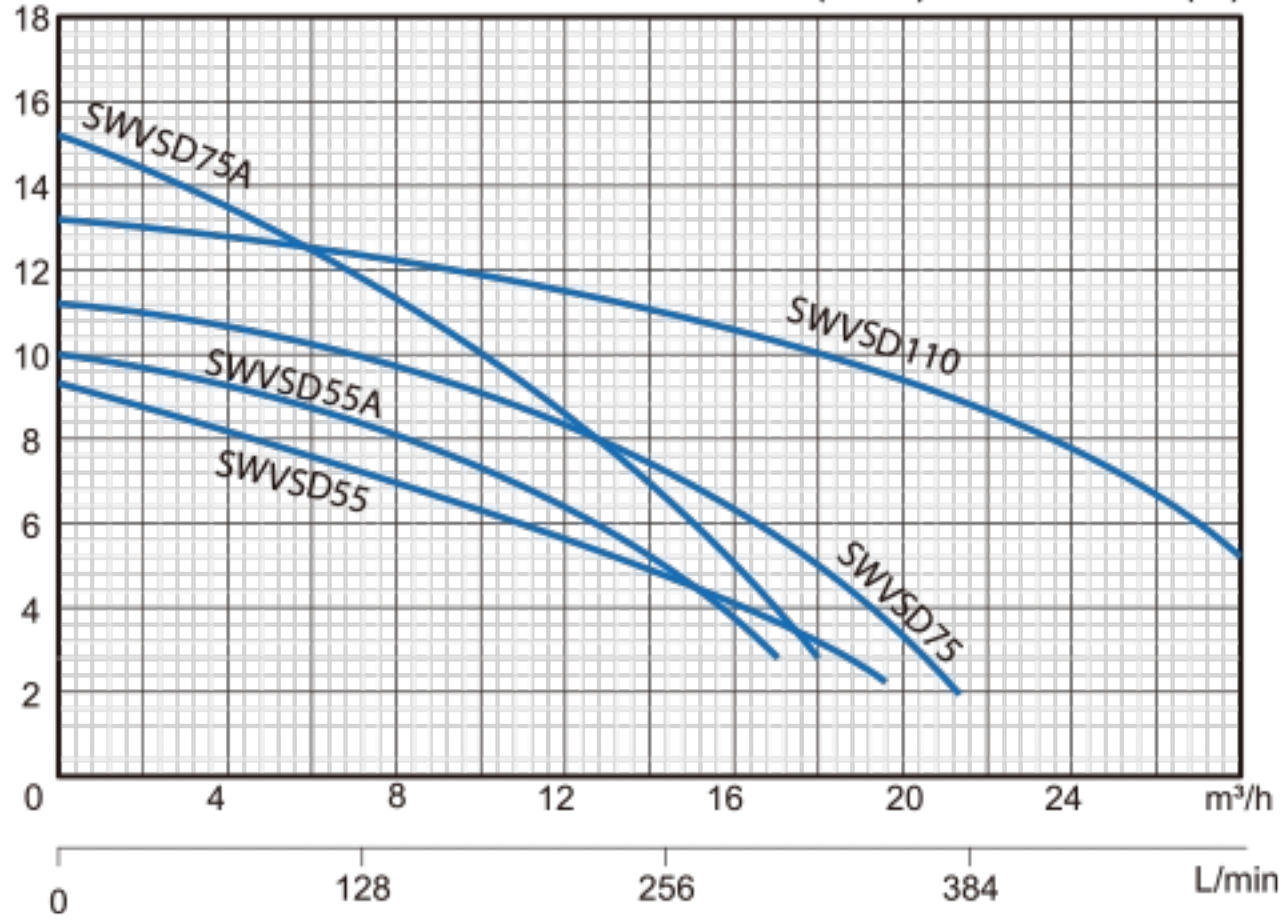

SWVS(D)

Single-Phase	Model		Power		Outlet Inch	Max.Flow m ³ /h	Max.Head m	Max Diameter mm	Dim. mm	Weight (kg)		20' Loading Qty pcs
	Three-Phase		kW	HP						G.W.	N.W.	
SWVSD55	-		0.55	0.75	2	18	10	40	260x190x480	17	16	1056
SWVSD75	-		0.75	1	2	21	12	40	260x190x500	19	18	1056
-	SWVS75		0.75	1	2	21	12	40	260x190x500	18.5	17.5	1056
SWVSD110	-		1.1	1.5	2	27	13	45	285x205x505	23	22	880
-	SWVS110		1.1	1.5	2	27	12	45	285x205x505	21	20	880
SWVSD55A	-		0.55	0.75	2	18	13	10	260x190x450	17	16	1320
SWVSD75A	-		0.75	1	2	20	15	10	260x190x470	19	18	1056
-	SWVS75A		0.75	1	2	20	15	10	260x190x470	18.5	17.5	1056