


Technical data

Identification Codes

LSW **m** **75** **C** **A**

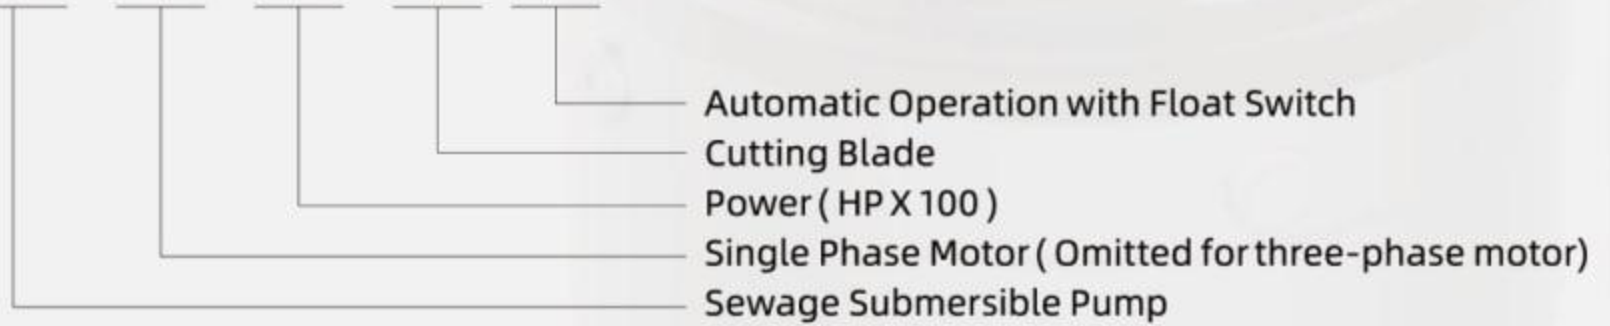

Parameter

Model	Power		Voltage/Frequency V/Hz	Outlet	Q.Max m ³ /h	H.Max m	Max.dia. of prarticle mm
	kW	HP					
LSWm25(A)	0.18	0.25	180-220/50	G1.5	11	8	15
LSWm30(A)	0.25	0.37	180-220/50	G1.5	12	9	15
LSWm50(A)	0.37	0.5	180-220/50	G1.5	13	11	20
LSWm75(A)	0.55	0.75	180-220/50	G2	16	13.5	25
LSWm100(A)	0.75	1.0	180-220/50	G2	19	17	25
LSWm150(A)	1.1	1.5	180-220/50	G2	26	13.5	30
LSWm200(A)	1.5	2.0	180-220/50	G2	32	19	30
LSWm100C(A)	0.75	1.0	180-220/50	G2	15	13	/
LSWm150C(A)	1.1	1.5	180-220/50	G2	25	14	/
LSWm200C(A)	1.5	2.0	180-220/50	G2	30	17	/

· Insulation class: F · Protection class: IPX8

Performance Curve

