





Application

- Filter of the pond water
- Beautiful ornament for the pond
- Oxygen enrichment of the pond water

Features

- Plastic casing
- Small, lightweight, durable and reliable
- Various nozzles available for displaying of cascade, water bell, etc.


Identification Codes

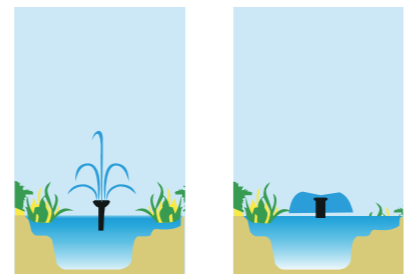

Cascade Water Bell

Model	XKF-15P	XKF-20P
Voltage	220V-240V/50Hz	220V-240V/50Hz
Input Power	15 W	20 W
Max.Head	1.0 m	1.1 m
Max.Flow	850 L/h	1100 L/h
Outlet	13 mm	13 mm
Cable	H05RN-F 10m	H05RN-F 10m

Operating Limits: Fluid temperature up to 35°C; Ambient temperature up to 40°C.

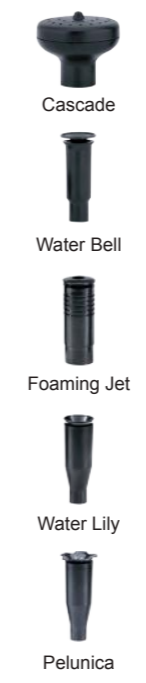


Application

- Filter of the pond water
- Beautiful ornament for the pond
- Oxygen enrichment of the pond water


Features

- Plastic casing
- Small, lightweight, durable and reliable
- Various nozzles available for displaying of cascade, water bell, etc.

Identification Codes



Cascade & Water Bell as standard, Foaming Jet, Water Lily & Pelonica are available on request.

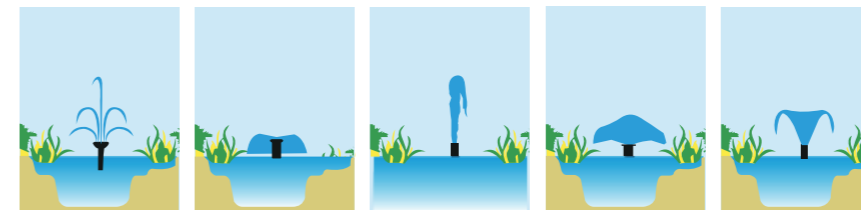

Cascade Water Bell Foaming Jet Water Lily Pelonica

Model	XKF-35P	XKF-55P	XKF-75P	XKF-95P	XKF-110P
Voltage	220V-240V/50Hz	220V-240V/50Hz	220V-240V/50Hz	220V-240V/50Hz	220V-240V/50Hz
Input Power	35 W	55 W	75 W	95 W	110 W
Max.Head	1.4 m	2.3 m	2.7 m	3.0 m	3.7 m
Max.Flow	1600 L/h	2300 L/h	2650 L/h	3500 L/h	3750 L/h
Outlet	19 mm	19 mm	19 mm	19 mm	19 mm
Cable	H05RN-F 10m	H05RN-F 10m	H05RN-F 10m	H05RN-F 10m	H05RN-F 10m

Operating Limits: Fluid temperature up to 35°C; Ambient temperature up to 40°C.